Installation Guide

Case components

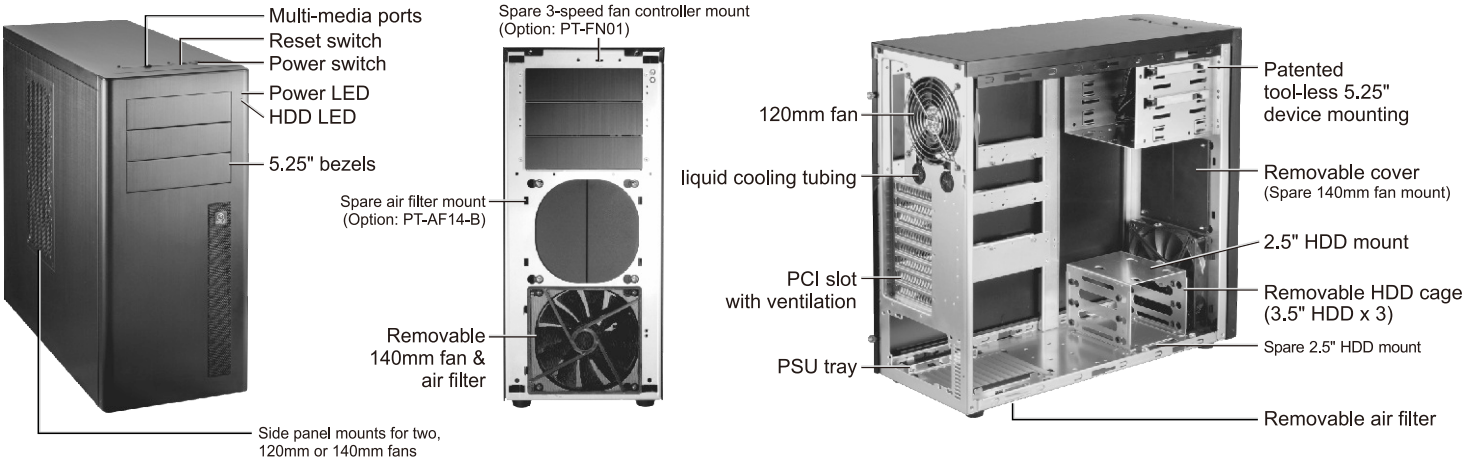

Hardware list

* Extra quantities are spare parts.

Buzzer (1)	Screw (21) for M/B & ODD spare parts	Thumb screws (12) for 3.5" HDD	Screw (4) for 2.5" HDD
Cable tie (2)	Anti-vibration rubber rings (4) for 2.5" HDD	Screws M3*9.5 (4) for 2.5" HDD	Screws (4) for PSU mounting
USB3.0 to USB2.0 converter (1)	Lock latch (1)	Screws (2) for lock latch	

Remove side panel



Remove 4
thumb screws.



Slide the panel backward
to release.

Remove front panel



Pull the front panel to release.

Motherboard installation

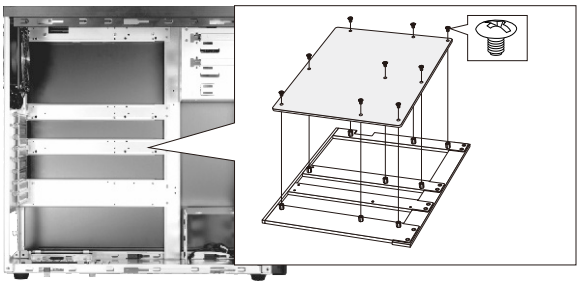

Place the M/B onto the copper bolt
and fasten screws to secure.

PSU installation



Place the PSU on the stand, and
push against the rear panel.



Please use screws to secure
the PSU.

Lock latch installation





Fasten 2 screws to secure
the lock latch.



Adding a lock by yourself.

ODD installation



Press the right and left sides
of the bezel to remove.

Press the plastic handle to
release the mounting bracket.



Push the ODD into the 5.25" rack,
Close the bracket to secure.

Installing, optional, 5.25" bezel

Option kit: C-02
Aluminum bezel



Put the aluminum bezel, fasten 2 screws
to secure.

If you wish to use the Aluminum bezel, please adjust
the metal pin position on the mounting bracket.

3.5" HDD installation



Release the HDD cages by loosening the 2 screws.



Insert the 3.5" HDD, and fasten thumb screws to secure.

Freedom of hardware setup

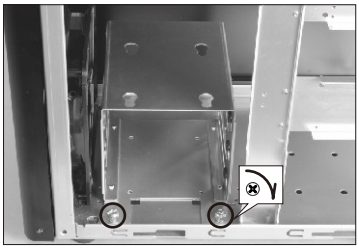

Can be rotate by 180 degree.

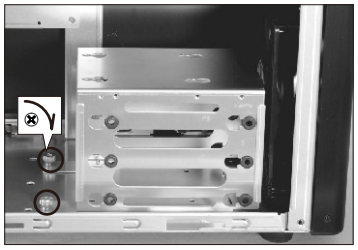

The HDD Cage can be rotate by 90 degree.

2.5" HDD installation-1



Install screws along with anti-vibration rubber rings onto the HDD.



Slide the HDD into place on the HDD platform.

2.5" HDD installation-2



Fasten the HDD to the cage bottom with 4 screws.

Remove bottom air filter



Push and release securing clips to remove the washable air filter.

Remove front air filter



Push and release securing clips to remove the washable air filter.

Remove the fan



Slide the anti-vibration fan module sideways to remove.

Installing, optional, 140mm fan (The fan is not included)



Slide the cover sideways to remove.



Remove the 4 screws and anti-vibration rubber rings.

Install screws along with anti-vibration rubber rings onto the fan.

Installing, optional, 120mm or 140mm fans on side panel (The fans & screws are not included)



Remove the 8 screws to release the cover.



For one center-mounted, 120mm or 140mm fan, use a cover piece on both sides.



For two, 120mm or 140mm, fans, use no cover pieces.



For one upper-mounted, 120mm or 140mm fan, use two cover pieces directly below.



For one lower-mounted, 120mm or 140mm fan, use two cover pieces directly above.

Supports liquid cooling systems

* Liquid cooling kit is not included.

⚠ Radiator can be mount on the back of the case.









I/O port installation



USB 3.0

Supports motherboard USB 3.0 20 Pin header



HD AUDIO



Cable installation guide

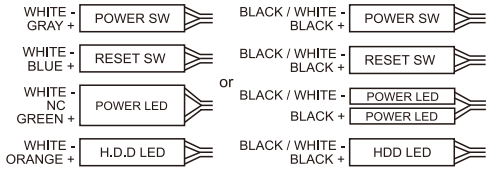

Buzzer installation guide



USB 3.0 to USB 2.0 converter